

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re PATENT application of:

Applicant: David Neil Payne et al.  
Serial No.: 09/931,286  
Filed: August 16, 2001  
For: WDM TRANSMITTER  
Art Unit: 2633  
Examiner: Hanh Phan  
Docket Number: DYOUP0222US

SUBMISSION OF PRIORITY DOCUMENT(S)

Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450


Dear Sir:

Regarding applicant's claim to convention priority, enclosed herewith is certified copy of the following priority application:

GB 9903880.4 filed February 19, 1999

Please acknowledge receipt of the enclosed priority document.

Respectfully submitted,  
RENNER, OTTO, BOISSELLE & SKLAR

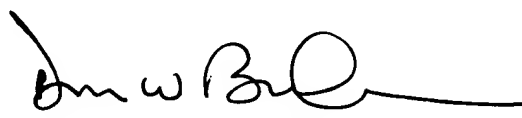
By   
Don W. Bulson, Reg. No. 28,192

1621 Euclid Avenue  
Nineteenth Floor  
Cleveland, Ohio 44115  
(216) 621-1113

CERTIFICATE OF MAILING

I hereby certify that this correspondence (along with any paper referenced to as being attached or enclosed) is being deposited with the United States Postal Service on the date shown below with sufficient postage as first class mail in an envelope addressed to Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

Date: 3-8-05

  
Jennifer A. Moore

Z:\SEC152\152\DWB\DOU\PI\P0222\PO222US.P04.wpd

**BEST AVAILABLE COPY**

**THIS PAGE BLANK (USPTO)**

**RECEIVED ON**



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, L.C. or PLC.



Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 19 October 2004

**CERTIFIED COPY OF  
PRIORITY DOCUMENT**

**THIS PAGE BLANK (USPTO)**

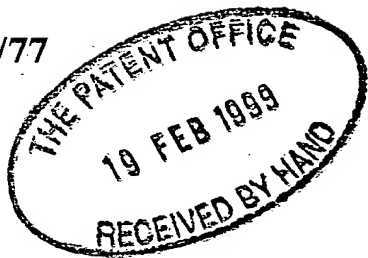

## Request for a grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference

P/6349.GB

2. Patent application number

(The Patent Office will fill in this part)

**9903880.4**

19 FEB 1999

3. Full name, address and postcode of the or of each applicant  
(underline all surnames)

UNIVERSITY OF SOUTHAMPTON  
HIGHFIELD  
SOUTHAMPTON  
SO17 1BJ  
UNITED KINGDOM

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

UNITED KINGDOM

798007000/

4. Title of the invention

OPTICAL DEVICE

5. Name of your agent (if you have one)

D YOUNG & CO

"Address for service" in the United Kingdom to which all correspondence should be sent  
(including the postcode)

21 NEW FETTER LANE  
LONDON  
EC4A 1DA

120 Holborn  
LONDON  
EC1N 2DY

Patents ADP number (if you have one)

59006

6. If you are declaring priority from one or more earlier patent applications, give the country and date of filing of the or each of these earlier applications and (if you know it) the or each application number

Country

Priority application  
number  
(if you know it)

Date of filing  
(day/month/year)

NONE

7. If this application is divided or otherwise derived from an earlier UK application, give the number and filing date of the earlier application

Number of earlier  
application

Date of filing  
(day/month/year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:  
a) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, or  
c) any named applicant is a corporate body.  
See note (d))

YES

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form 0

Description 7

Claims(s) 0

Abstract 0

Drawing(s) 4

10. If you are also filing any of the following, state how many against each item.

Priority documents 0

Translations of priority documents 0

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 0

Request for preliminary examination and search (Patents Form 9/77) 0

Request for substantive examination (Patents Form 10/77) 0

Any other documents (please specify) 0

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

DY - C  
D YOUNG & CO  
Agents for the Applicants

19 02 99

12. Name and daytime telephone number of the person to contact in the United Kingdom

J A TURNER

(01703)  
634816

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505

b) Write your answers in capital letters using black ink or you may type them

c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.

d) If you answered 'Yes' Patents Form 7/77 will need to be filed.

e) Once you have filled in the form you must remember to sign and date it.

f) For details of the fee and ways to pay please contact the Patent Office.

## OPTICAL DEVICE

Optical fibre telecommunication systems are undergoing continual expansion, fuelled by the need for more bandwidth. The nature of the expansion in demand for bandwidth is such that wavelength division multiplexing (WDM) of optical channels is required to overcome the bottleneck in capacity which arises in time-division-multiplexed (TDM), single-wavelength systems due to speed limitations of electronic circuits. State-of-the-art commercial systems use up to sixteen simultaneous channels to increase system capacity but the demand for capacity will continue to increase. Although the capacity of the third telecommunications window is very large, loss limitations dictate that optical amplifiers are essential building blocks in modern networks and optical amplifiers, in particular erbium-doped fibre amplifiers (EDFA), determine the currently available practical bandwidth. Current trends are towards dense wavelength division multiplexing with a 100GHz channel spacing as the next generation of WDM comb standards. Recent experiments have demonstrated 1Tb/s transmission using 100x10Gb/s [1] and 50x20Gb/s [2] WDM channels over 400km and 600km, respectively.

There are two alternative approaches to implement high quality sources for telecommunication purposes, namely the semiconductor and the fibre distributed-feedback (DFB) laser. Commercial systems and most experimental systems being studied so far [1] [2] use various types of semiconductor lasers (SLs) as sources, for example DFB or DBR lasers. SLs are powered individually and are usually wavelength-stabilised (in order to meet the stringent telecom grid requirements) by the use of an external cavity. It is also well known that SLs are prone to aging effects and sudden failures resulting in a complete loss of the corresponding communication channel. This renders SLs quite unsuitable for integration, since failure of a single laser implies replacement of the entire integrated chip. First developed at Southampton University [3], fibre DFBs have been studied for the last few years and have potential advantages in terms of wavelength setability and stability, as well as reliability, longevity and cost, such that they appear as a promising alternative to semiconductor laser sources. In addition and most importantly, there is no known degradation and failure mechanism for fibre or waveguide DFB lasers. Fibre and waveguide DFB lasers, though, still rely on high power semiconductor lasers for efficient

pumping and large output powers. Semiconductor pump lasers, however, can be appropriately multiplexed, using standard NxN multiplexing techniques, to power an array of fibre DFB lasers [4]. In this case, each fibre DFB laser is equally fed by all pump lasers and, therefore, failure of an individual pump will only uniformly reduce the pumping level on each DFB without any catastrophic effect.

Viewed from one aspect the invention provides an optical device that addresses at least some of the above described problems.

In the following we disclose a fully integrated transmitter module for DWDM applications. Figure 1 shows schematically the general configuration of the proposed module. M pump lasers (stage#1) are multiplexed by an MxN coupler (stage#2) and used to feed an array of N optically pumped lasers emitting at wavelengths  $\lambda_1, \lambda_2, \dots, \lambda_N$  (stage#3). The parameter M determines the number of pump lasers as well as the number of inputs of the pump-multiplexing coupler and can be smaller or equal to parameter N that determines the number of optically pumped lasers. The laser outputs can be passed through isolators (stage#4) before entering the next section (stage#5) where they are monolithically modulated. The outputs of the modulators are passed through an array of tunable attenuators (stage#6). Finally all the individual channel outputs are recombined into a single output in stage#7.

Stage#1 comprises M pump lasers that can be electrically or optically driven. The parameter M can be larger or equal to 2. The pump lasers emit at any appropriate wavelength and power level to optically pump the laser cavities of stage#3. As an example, appropriate pumping wavelengths can be in the regions of 980nm, 1060nm, 1480nm, to mention a few.

The MxN multiplexer (stage#2) can be any composite coupled-waveguide or fibre structure that splits any of the M inputs equally into any of the N outputs. As already mentioned, M is smaller or equal to N. The pump multiplexers can be based on single NxN fused (or multimode) couplers, or concatenated 2x2 couplers (50:50 at the pump wavelength). The couplers can be in fibre or planar waveguide form. Another example of pump multiplexer is the arrayed waveguide



grating (AWG) which is particularly attractive for large  $M$ . Typical values of  $N$  is 2, 4, 8, 16...256...

The optically-pumped laser section (stage#3) will comprise of  $N$  fully thermally-stabilised and optimised individual single-polarisation fibre or waveguide DFB or DBR lasers. Fibre or waveguide DFBs can be fabricated in a material doped with an appropriate rare earth that provides sufficient gain over a certain bandwidth anywhere within the 800nm to 1900nm range.

$\text{Er}^{3+}$  and  $\text{Er}^{3+}/\text{Yb}^{3+}$  are two examples of such appropriate dopants that provide gain at the 1550nm window. The optically pumped lasers can also be based on semiconductor technology.

The isolator array (stage#4) is introduced to eliminate feedback due to fibre splices or waveguide refractive-index/modal-field mismatches or Rayleigh backscattering and avoid laser output frequency and power instabilities.

For the modulation of the optical signal in stage#5, a number of different modulators can be used, such as  $\text{LiNO}_3$  modulators or  $\chi^{(2)}$ -based electro-optic modulators. In stage#6 the individual channels are passed through an array of  $N$  variable optical attenuators that are used to adjust their output powers. The optical attenuators can be electrically or optically controlled by tapping out and monitoring a small portion of their output. The variable optical attenuator array can be used to either equalise the optical powers or adjust them appropriately (pre-emphasis) before launching them into an amplified optical link. The attenuator array can be alternatively inserted between stages#3 and #4 or #4 and #5. In stage#7, all the modulated and properly adjusted channel outputs are recombined into a single output for launching into the optical network. The recombiner circuitry can be based on planar waveguide or fibre optical technology.

If we define as *pump redundancy* the amount of relative pump reduction (in %) when one of the pump lasers fails, it can be easily realised that the proposed  $M \times N$  ( $M \leq N$ ) pump multiplexer, in Figure 1, can provide  $(1/M)\%$  pump redundancy. In most telecom applications, a pump redundancy of  $\sim 10\%$  will usually suffice. For  $M \geq 16$ , it is obvious that the proposed  $M \times N$  pump multiplexer provides excessive pump redundancy. On the other hand, for  $M \geq 16$  the complexity

of or the number of components required for the pump multiplexer increases dramatically and renders the implementation of such device either impractical or impossible or extremely expensive. To ease the design, improve the performance or reduce the cost of the pump multiplexer (stage#2), we propose a different approach that is shown schematically in Figure 2. The pump redundancy is applied in  $n$  blocks of  $M_i$  pumps, where  $M_i$  ( $i=1,2..n$ )  $< M$  and  $M_1+M_2+...+M_n = M$ . Each block of  $M_i$  ( $i=1,2,..n$ ) pumps is feeding a block of  $N_i$  ( $i=1,2...n$ ) optically pumped lasers, where  $N_i$  ( $i=1,2..n$ )  $< N$  and  $N_1+N_2+...+N_n = N$ , through a  $M_i \times N_i$  pump multiplexer. In this case the overall pump redundancy provided by the multiplexer is  $(1/M_p)\%$ , where  $M_p$  is the minimum  $M_i$ . The rest of the stages are the same as Figure 1.

As an example of the complexity reduction provided by the scheme of Figure 2, let us consider two different implementations of a 128x128 pump multiplexer. If the  $N \times N$  multiplexer (where  $N=2^m$ ) is comprised of concatenated 2x2 couplers, it can be easily shown that the total number of required couplers is  $C = m \cdot 2^{m-1}$ . In the configuration of Figure 1,  $M=N=2^7$ , ( $m=7$ ) and therefore the number of required couplers is  $7 \times 2^6 = 448!!!$ . The pump redundancy in this case is 0.008%. However, the total splice and radiation losses will make this very expensive solution impractical. If on the other hand we adopt the strategy of Figure 2 instead and divide the pump multiplexing unit in 16 blocks of 8 inputs each, then  $M_1=M_2=...M_{16}=8$  and the total number of couplers is reduced to  $16 \times (3 \times 2^2) = 16 \times 12 = 192$ . Each block involves only 12 couplers and therefore shows massively reduced insertion loss. Such an approach not only halves the cost of the unit, but also reduces the insertion loss to very small levels. The pump redundancy in this case is  $\sim 12\%$ , very close to the 10% target. Adoption of the same strategy in planar waveguide, or AWG based multiplexers will result in similar benefits.

Stages #1 to #6, in Figures 1 and 2, can be either separate units connected optically together or they can be combined into integrated subgroups connected together. Each subgroup can contain two or more of the aforementioned stages. They can also all be integrated on a single all-planar or hybrid waveguide chip to produce a fully integrated and robust transmitter module. The integrated chip can be based on glass or LiNO<sub>3</sub> technology or any other appropriate integrated optics technology. In the case that all stages are fully integrated in one chip or stages #3, #5, #6

and #7 constitute the only fully integrated subgroup, the isolator array (stage#4) can be ignored and replaced with a single isolator at the combined output of the integrated transmitter (to avoid the deleterious effects of Rayleigh back-scattering produced by the fibre-optic link). The transmitter topologies (Figure 1 and 2) disclosed here require each optically-pumped-laser output being on a separate fibre or waveguide so that it can be easily interfaced with the optical modulator. The laser array is fully protected from backreflections by the intervened isolators. A single pump can be used to pump a number of lasers by splitting the pump output and distributing it to a number of optically pumped lasers. Reliability of the module is an important issue, and this can be improved by multiplexing and splitting a number of pump lasers and distributing the power to the optically pumped lasers. The loss of a single pump laser will then not cause the loss of any channels. The drive currents of the remaining pump lasers could be increased to compensate for the lost laser, if sufficient margin has been built in, until the failed unit is replaced. The wavelength separation of the optically pumped lasers can be designed with flexibility but it is proposed to generate a 100GHz optical comb or any other comb compatible with the ITU grid. All laser outputs, after being modulated, are recombined into one output so that they can all be launched into the optical communication network.

### **Example of Integrated 16-Channel WDM Transmitter**

Figure 3 shows an example of the proposed Integrated 16-channel WDM Transmitter that uses eight 980nm pump lasers (stage#1). The pump redundancy scheme (stage#2) comprises an 8x16 all fibre star coupler consisting of 24 2x2 fibre couplers (50:50@980nm). Stage#3 consists of 16 single-polarisation, unidirectional fibre DFB high power lasers at 1550nm. Stage#4 includes 16 pigtailed fibre isolators. Stage#6 is an all fibre multiplexer comprised of 15 2x2 fibre couplers (50:50@1550nm). The optical modulators (stage#5) and optical attenuator (stage#7) arrays have been ignored in this example. It should, however, be stressed that the pump unit (stage#1) includes an additional WDM coupler (980/1550nm) in front of each pump source in order to filter out the residual laser power (at 1550nm) that leaks out the back-end of the DFB lasers and propagates in the backward direction.

### **Integrated WDM Transmitter with feedback control**

The pump redundancy scheme (stage#2) in Figure 1, ensures that any pump power reduction, due to one or more pump failures, is equally distributed among the optically pumped laser array (stage#3). In this case, the laser output powers are reduced by the same amount. Therefore, if the output power of one of the optically pumped lasers is monitored, as shown in Figure 4, the electrical power of the active pump lasers is adjusted to restore the fibre laser output powers (until the faulty pump(s) is(are) replaced). Similar feedback control can be employed in the pump redundancy scheme of Figure 2. In this case at least one laser corresponding to each block should be monitored and only the affected block of pumps is adjusted. In both cases, the feedback can be provided by the variable attenuator feedback circuitry.

## References:

- [1] A. K. Srivastava et al., "1Tb/s transmission of 100 WDM 10Gb/s channels over 400km of TrueWave™ fiber", in *OFC 98 Technical Digest*, paper PD10, 1998.
- [2] S. Aisawa, T. Sakamoto, M. Fukui, J. Kani, M. Jinno and K. Oguchi, "Ultra-wide band, long distance WDM transmission demonstration: 1Tb/s (50x20Gb/s), 600km transmission using 1550 and 1580nm wavelength bands", in *OFC 98 Technical Digest*, paper PD11, 1998.
- [3] J. T. Kringlebotn, J.-L. Archambault, L. Reekie and D. N. Payne: 'Er<sup>3+</sup>:Yb<sup>3+</sup>-codoped fibre distributed-feedback laser', *Optics Letters*, 19(24), 2101-3, Dec 1994.
- [4] W. H. Loh, B. N. Samson, L. Dong, G. J. Cowle and K. Hsu, "High performance single frequency fibre grating-based erbium:ytterbium-codoped fibre lasers", *J. Lightwave Technology*, vol. 16, no. 1, pp. 114-118 (1998).

**THIS PAGE BLANK (USPTO)**


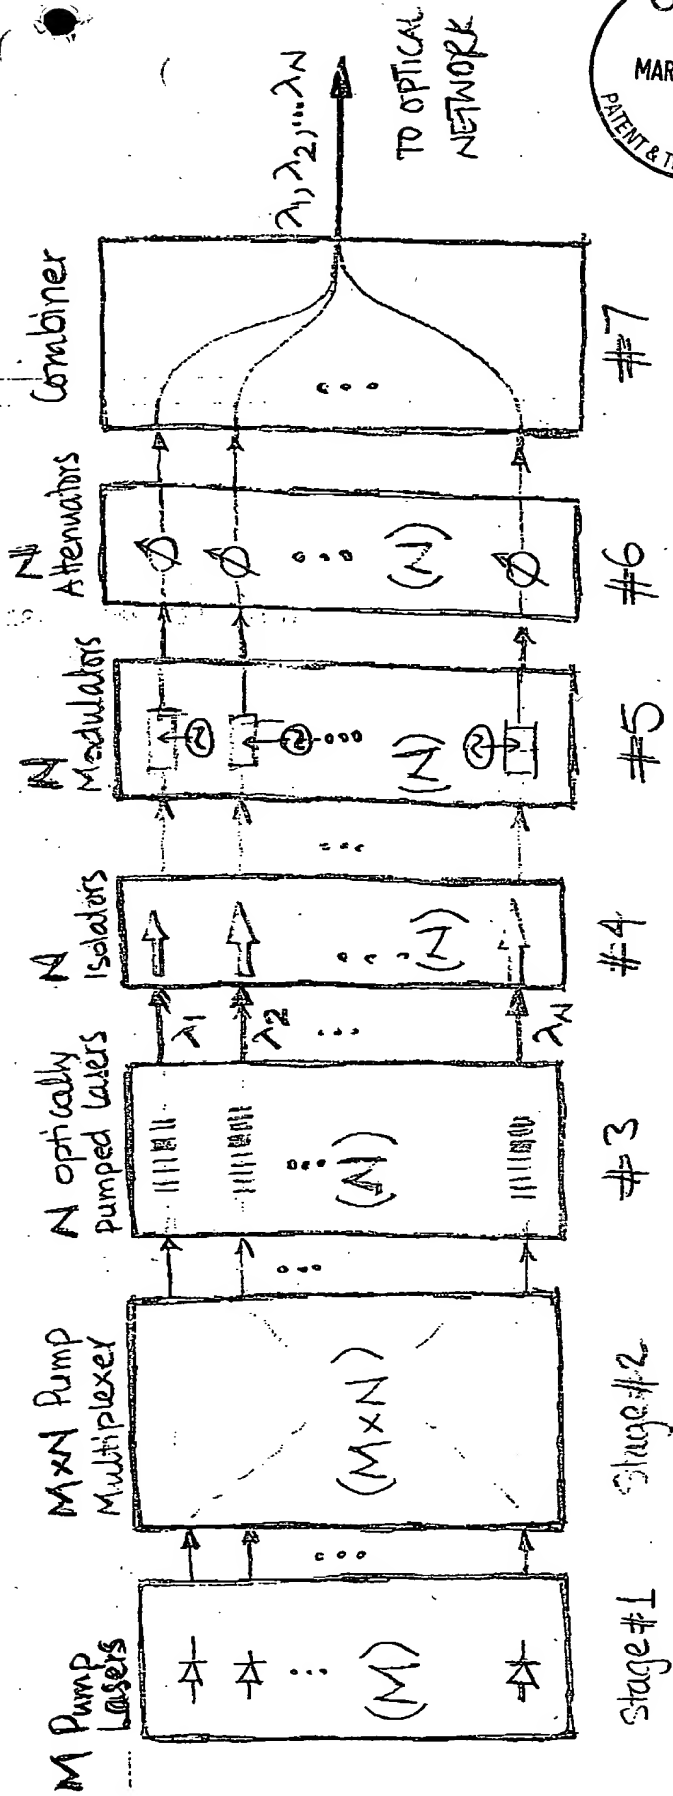


Figure 1

**THIS PAGE BLANK (USPTO)**

**SECRET**



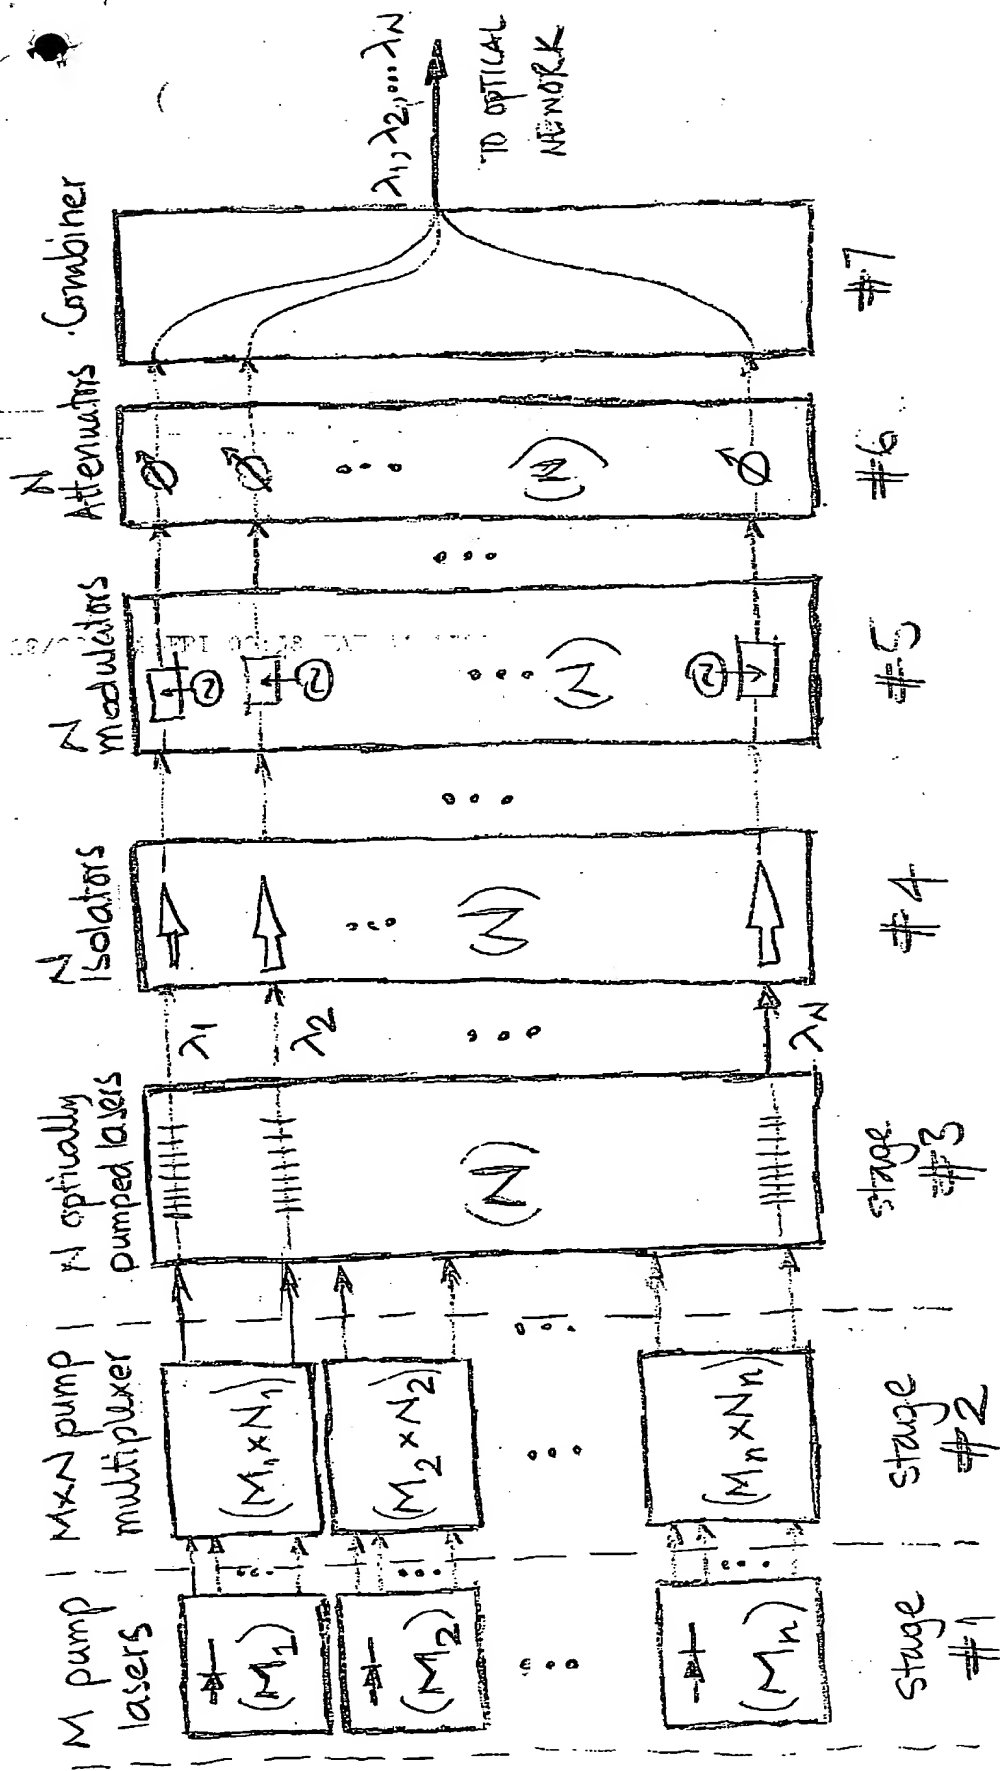

$$M_1 + M_2 + \dots + M_n = M$$

$$N_1 + N_2 + \dots + N_n = N$$

Figure 2

**THIS PAGE BLANK (USPTO)**

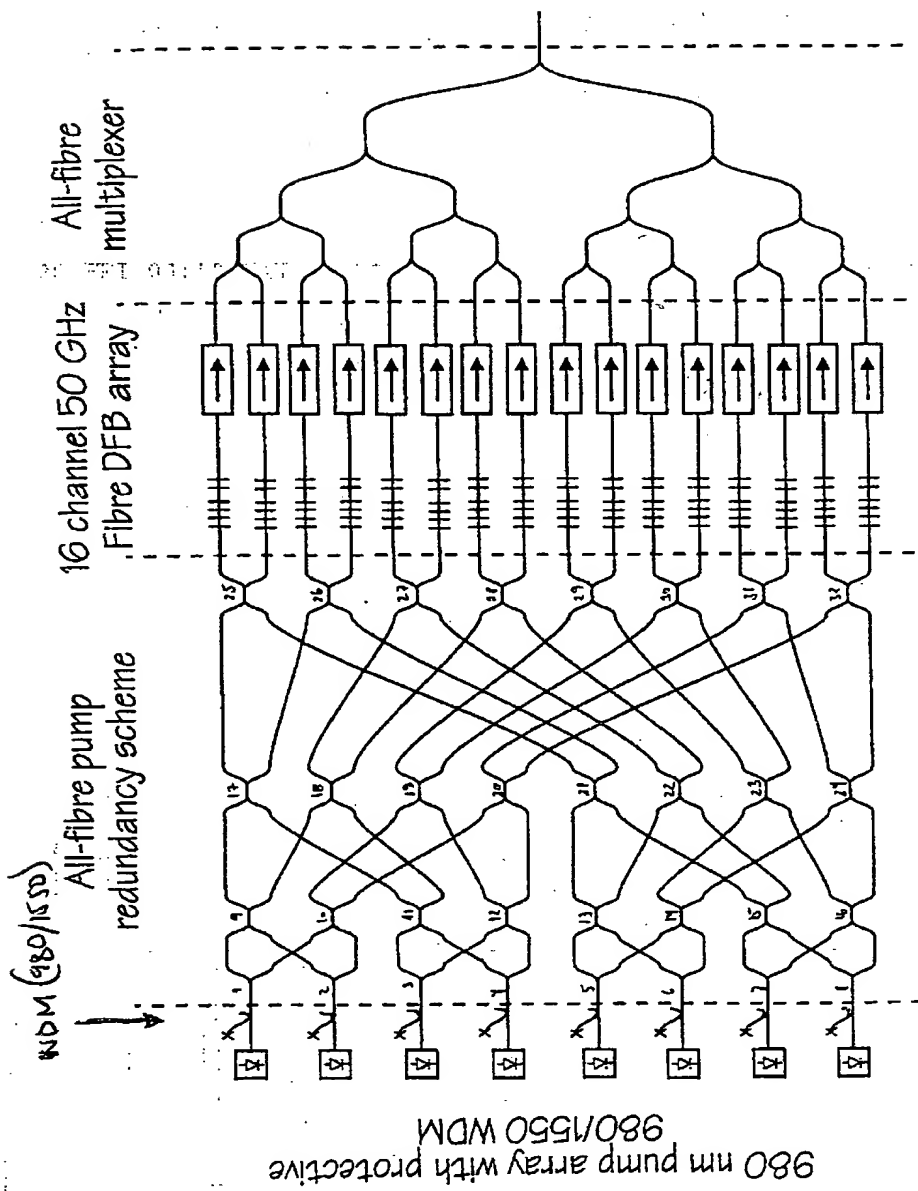


Figure 3

**THIS PAGE BLANK (USPTO)**

**RECEIVED OCT 10**

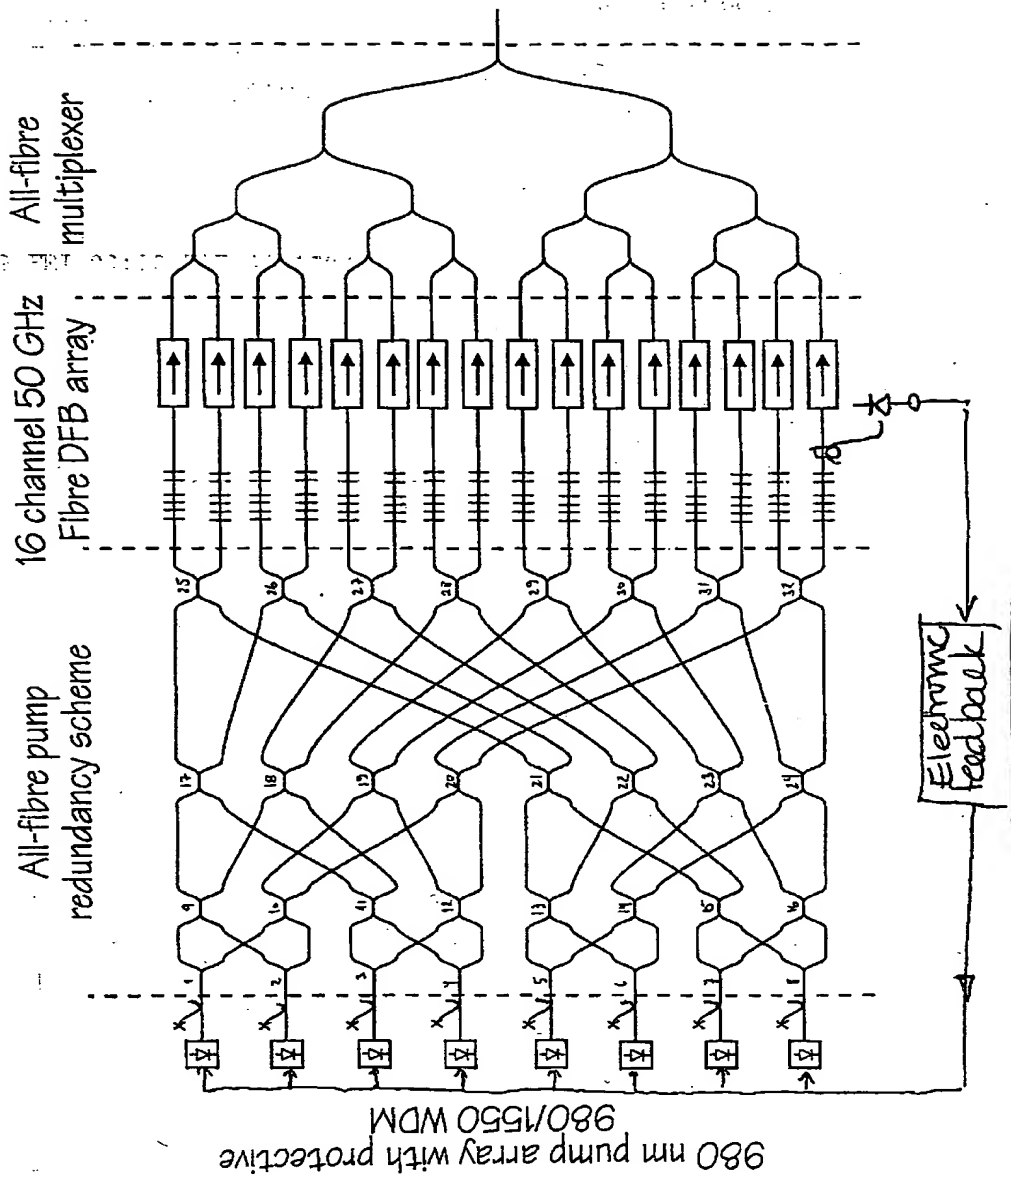


figure 4

**THIS PAGE BLANK (USPTO)**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**